



Technical Data Sheet

Theta PI-102



Theta PI-102 The purpose of the Theta PI-102 is to electrically isolate input, outputs and power supply. The isolator fulfills all requirements and regulation concerning electromagnetic compatibility EMC and safety (IEC61326-1 and IEC 61010-1:2010).

Special Features

- User programmable using DIP Switches
- Response time < 50 msec
- Easily Stock-able for Channel Partners
- Accuracy Class - 0.2
- Auxiliary Supply - 60-300 V AC/ DC
- 20-40 V AC / 20-60 V DC
- LED provided for status indication

Application

Theta PI-102 The purpose of the STI Theta PI-102 is to electrically isolate input, outputs and power supply. The isolator fulfills all requirements and regulation concerning electromagnetic compatibility EMC and safety (IEC61326-1 and IEC 61010-1:2010). The device has one input and provides two independent outputs in an extremely small space.

Application

Electric Isolation	Two electrically isolated analog outputs prevent interference voltage and current. Solves grounding problem in meshed signal networks.
	High electric isolation between input and outputs – 2.3 kV, and power supply versus all other circuits – 3.0 kV.
Function	Simple dc isolator serves to electrically isolate programmable input dc signal to programmable dc output signal.
Features	All input signal range and output signal range are user programmable.
	Electric isolation between input, outputs and power supply
	Prevents false measurement due to spurious potentials
	Processes live zero signals, provision for signal conversion
	Red LED signals indicates device in operating condition
	Electrical insulation between power supply versus all other circuits
	3.0 kV, and between input and outputs -2.3 kV

Technical Specifications

Measuring inputs :

DC current standard ranges	0...20mA 0...10mA 4...20mA 0...24mA
Input resistance	≤15.5Ω
DC voltage standard ranges	0...12V 0...10V 0...5V 1...5V
Input resistance	<div> <div>0...12V</div> <div>0...10V</div> <div>0...5V</div> <div>1...5V</div> </div> <div> <div>≥100 kΩ</div> <div>≥ 60 kΩ</div> </div>

Measuring output 1 and output 2:

DC current standard ranges	2...10mA 4...20mA 0...10mA 0...20mA
Burden voltage	15V
External Resistance	$R_{ext} \max. [\Omega] = 15V / I_{AN} [mA]$ $I_{AN} = \text{Output circuit full scale value}$
DC voltage standard ranges	0...05V 1...05V 0...10V 2...10V
Burden	$R_{ext} \min. [k\Omega] = U_{AN} [V] / 5 \text{ mA}$ $U_{AN} = \text{Output circuit full scale value}$
Current limiter at $R_{ext} = 0$	< 42mA for voltage output
Voltage limiter at $R_{ext} = \infty$	< 20 V for current output
Residual ripple in Output	< 0.4% p.p.
Response time	< 50 ms
Common mode voltage	100V
Pollution degree	2

Power supply

Rated operating voltage	60 ... 230... 300 V DC/AC OR 20 ... 24 ...40 VAC/20...30...60 VDC
Rated operating frequency	45 ... 50-60 ... 65 Hz
Power input	≤ 5 VA


Accuracy data (Acc to IEC 60688)

Basic Accuracy	Limit error < ± 0.2 % including linearity and reproducibility errors.
----------------	---

Reference conditions


Ambient temperature	23°C ± 2°C
Output burden	Current: 0.5 * $R_{ext} \max.$ Voltage: 2 * $R_{ext} \min.$
Nominal value of Aux	230V 50Hz or 60 Hz AC/DC
Supply voltage:	30V 50Hz or 60 Hz AC/DC

Dimensions Details

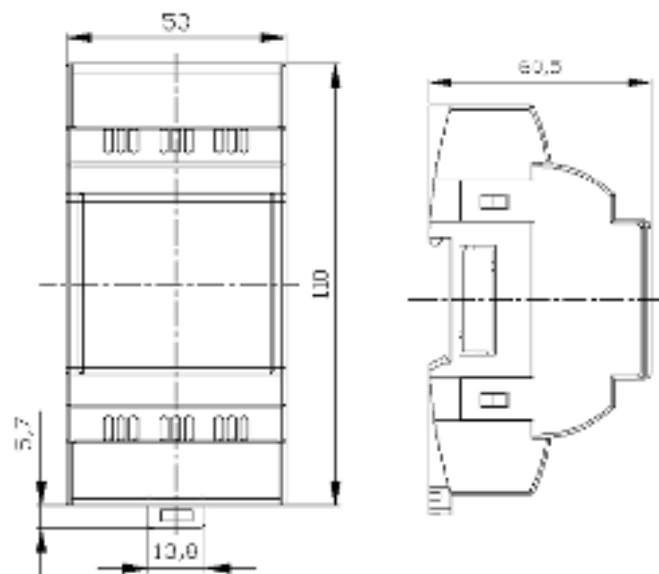

Note : All Dimensions are in mm

Electrical Connections

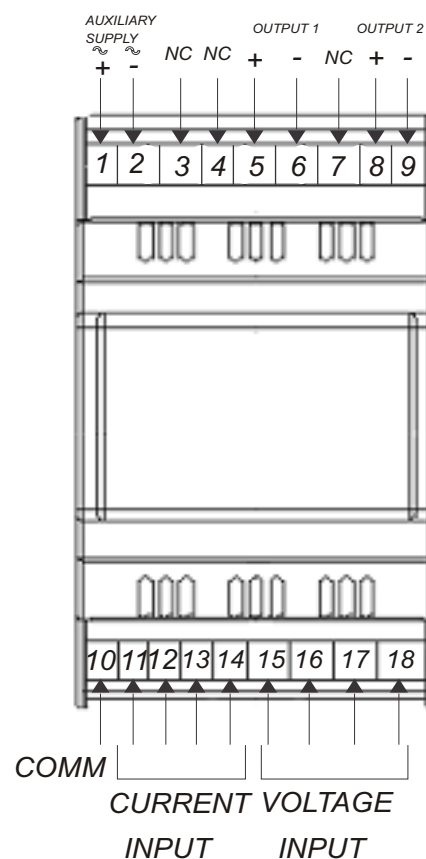

All the dimensions are in mm.

Technical Specifications

Influence factors

Temperature	$\pm 0.01\%$ per °C
Burden influence	$< \pm 0.1\%$ for current output $< \pm 0.1\%$ for voltage output
Switch-on drift	$< \pm 0.2\%$
Longtime drift	$< \pm 0.3\%$ / 12 months
Magnetic field	$< \pm 0.2\%$ (400 A/T)

Regulations

Electromagnetic Compatibility	Acc. to IEC 61326 - 1
Protection	For Housing : IP40 Terminals : IP20
Electrical standards	Acc. to IEC 61010 -1 / EN 61 010 -1
Pollution degree	2
Over voltage category	III for power supply II for measuring input and measuring output.

Test Voltage	Power supply versus : <ul style="list-style-type: none"> All 3.7 kV, 50 Hz 1 min (Leakage current 5mA) Measuring inputs versus : <ul style="list-style-type: none"> Measuring outputs 2.3 kV, 50 Hz 1min & O/P1 to O/P 2: 500 V, 50 Hz, 1 min All circuits versus case: 3.7kV, 50 Hz ,1min
--------------	---

Environmental condition

Climatic rating	Climate class 3 acc. to VDI / VDE 3540
Operating Temperature	- 10 ...23... 55 °C
Storage temperature	- 40 °C to 70 °C
Annual mean relative humidity	< 75% standard Climatic rating

Installation Data

Mounting position	Rail mounting
Weight	Approx. 0.25kg

Connection Terminal

Connection Element	Conventional Screw type
Permissible cross section of the connection lead	4.0mm ² single wire or 2 x 2.5mm ² Fine wire
Permissible Vibrations	2 g acc. to EN 60 068-2-6
Shocks	3 x 50 g 2 shocks each in 6 directions Acc. to EN 60 068-2-27

Electrical Connections

Connection	Terminal details	
Measuring Current input	+	-
A)0....24mA	11	10
B)4....20mA	12	10
C)0....20mA	13	10
D)0....10mA	14	10
Measuring Voltage input		
A)1....05V	15	10
B)0....05V	16	10
C)0....12V	17	10
D)0....10V	18	10
Measuring output 1	5	6
Measuring output 2	8	9
Auxiliary supply	1	2

Configuration

Theta PI-102 inputs and outputs can be configured using slide switches. Table A and B contains the switch position information for the configuration of input and output1/output2 respectively. When ever configuration is changed output1 and output 2 fine adjustment must be accomplished using "Z" (Zero) and "S" (Span) potentiometers provided on front panel separately for both the outputs i.e. output1 and output2.

FIGURE: FRONT PANEL OF Theta PI-102




TABLE A: INPUT RANGE SELECTION

Input	S1	S2	S3	S4
0...20mA	OFF	OFF	OFF	OFF
0...10mA	OFF	OFF	OFF	ON
0...24mA	OFF	OFF	ON	OFF
4...20mA	OFF	OFF	ON	ON
0...10V	OFF	ON	OFF	OFF
0...12V	OFF	ON	OFF	ON
0...5V	OFF	ON	ON	OFF
1...5V	OFF	ON	ON	ON

TABLE B: O / P1 & O / P2 RANGE SELECTION

Output	S1 & S2	S3	S4
0...10mA	OFF	OFF	OFF
0...20mA	OFF	OFF	ON
2...10mA	OFF	ON	OFF
4...20mA	OFF	ON	ON
0...5V	ON	OFF	OFF
0...10V	ON	OFF	ON
1...5V	ON	ON	OFF
2...10V	ON	ON	ON

Output characteristics

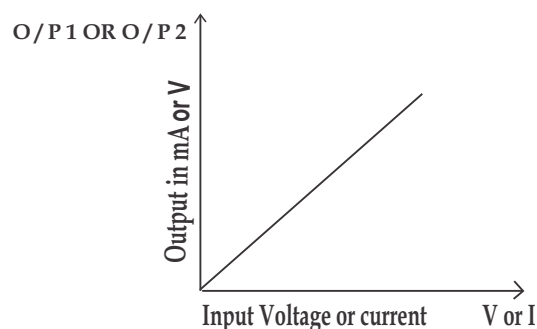

Variants:

Auxillary Supply
60-300 VAC/DC
20-40VAC/20-60VDC

Ordering information

Product Code	PR10-	X	X	X	X	X	X	0	0	0	0	0ST



sifam tinsley
PRECISION INSTRUMENTATION

Sifam Tinsley Instrumentation Inc.
3105, Creekside Village Drive,
Suite No. 801, Kennesaw,
GA 30144 (USA)
E-mail Id : psk@sifamtinsley.com
Web : www.sifamtinsley.com
Contact No. : +1 404 736 4903

Sifam Tinsley Instrumentation Ltd
Unit 1 Warner Drive,
Springwood Industrial Estate
Braintree, Essex, UK, CM72YW
E-mail: sales@sifamtinsley.com
Web: www.sifamtinsley.com/uk
Contact: +44(0)1803615139