




Technical Data Sheet

MR220 Decoupling Module

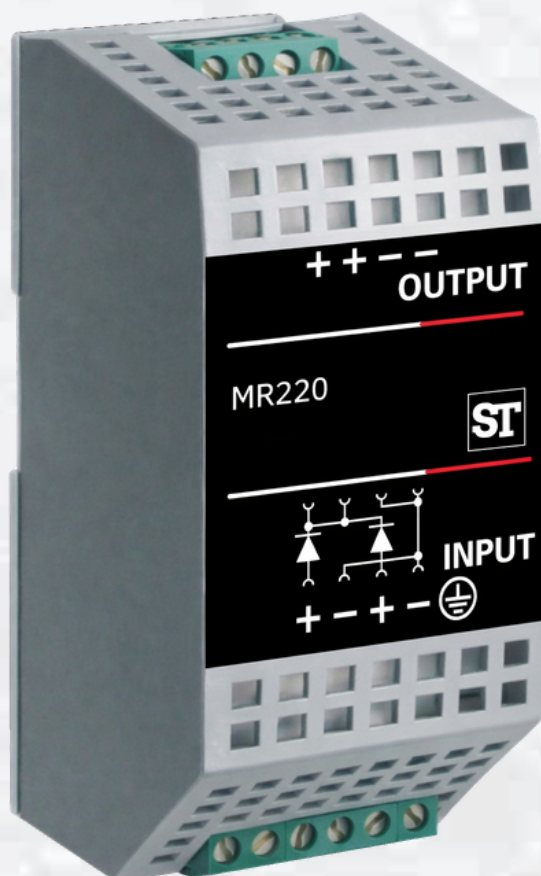

MR220 The decoupling module is a dual input diode with 2 inputs and one output, suitable for various applications such as to produce redundant applications to decouple power sources from each other as well as from the loads e.g., separation of sensitive loads from the power bus, design buffered branches, block reverse power etc.

Special Features

- Supports 10–60 VDC and up to 25 A
- Decoupling diode for redundancy and source isolation
- Protects power sources and load from mutual interference
- Ultra-compact design with DIN rail mounting
- Ideal for redundant power supply applications



Parameters

Input

In Current (Dual Input Mode;1+1Redundancy)	2 x 12.5 A max
Input Current (Single)	1 x 25 A max
Input 1	10 – 60 Vdc, 0 – 25 A
Input 2	10 – 60 Vdc, 0 – 25 A
Peak Current	200 A for max. 10 ms
Reverse Current	25 mA max. per diode

When both inputs are used “Dual Input Mode” the output current results as the sum of the two inputs, max 25A. If used with only one input “Single Input Mode”, both positive input terminals can be linked.

Output

Output Voltage “Drop Out” Vin - Vout	0,9 (max.) 0-25 A
Rated Current at 24 V 40°C (In)	25 A (permanent)
Rated Current at 24 V 50°C (In)	22 A (permanent)
Rated Current at 24 V 60°C (In)	20 A (permanent)
Current Short Circuit Icc	60 A
Dissipation power load max (W)	12

Climatic Data

Ambient Temperature operation	-25 up to +70 °C (>60°derating 2.5% °C)
Ambient Temperature Storage	-40 up to +85 °C
Humidity at 25 °C, no condensation	95 % to 25 °C

General Data

Fuse: Input or output (recommended)	35 A (MCB curve B)
Protection Class (EN/IEC 60529)	IP 20
Reliability: MTBF IEC 61709	> 500.000 h
Pollution Degree Environment	2
Connection Terminal Blocks Screw Type	2,5 mm (24 – 14 AWG)
Protection class	I with PE connected
Dimension (w-h-d)	1.97x4.72x1.97 inches
Weight	0.4 kg approx.
Cooling	Convection cooling no fan required
	Free space for cooling 10 mm around the device

Norms and certifications:-

- The CE mark in According to EMC 89/336/EEC and 93/68/EEC and the Low voltage directive 2006/95/EC.

Electrical Safety:-

- According to IEC/EN 60950 (VDE 0805) e EN 50178 (VDE 0160) for assembling device. The unit must be installed according to IEC/EN 60950. Input / Output separation: SELV EN60950-1 and PELV EN 60204-1. Double or reinforced insulation.

EMC Immunity:-

- EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN61000-6-2


EMC Emission:-

- EN61000-6-4, EN61000-3-2

Standards Conformity:-


- EN 60204-1 Safety of Electrical Equipment Machines

Block Diagram:-

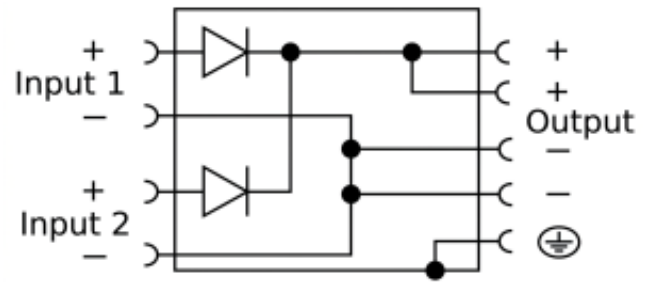


Wiring Scheme


Dual Input Mode (1+1 Redundancy)

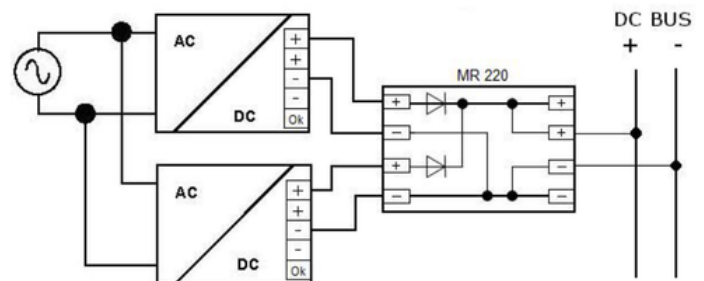

Single Input Mode

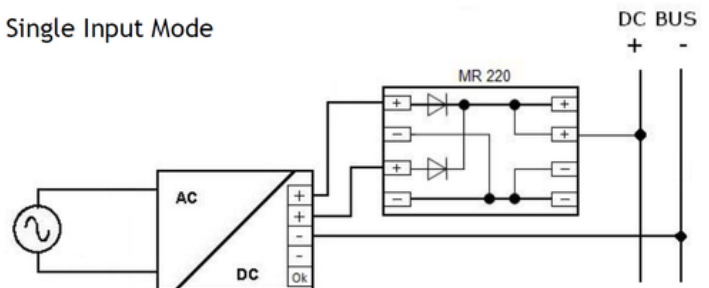

Output derating Curve
Continuous Load

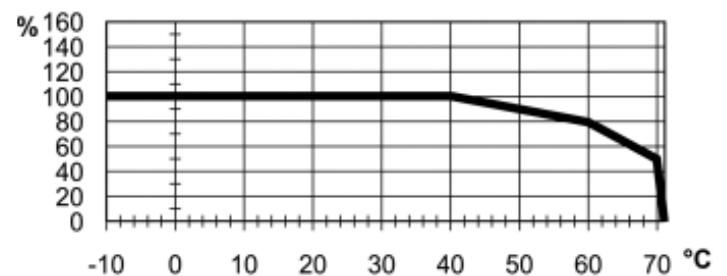

Ordering Information

MR220 Decoupling Module

Product Code	RF13-	X	X	0	0	0	0	0	0	0	0	0ST
		0										
MR220			0									
Reserved				M	0	0	0	0	0	0	0	0ST



Sifam Tinsley Instrumentation Inc.
2105, Barrett Park Dr, Unit 105,
Kennesaw, GA 30144
(USA)
E-mail Id : psk@sifamtinsley.com
Web : www.sifamtinsley.com
Contact No. : +1 404 736 4903