




Technical Data Sheet

Sigma Series FM Meter



File No. E471457

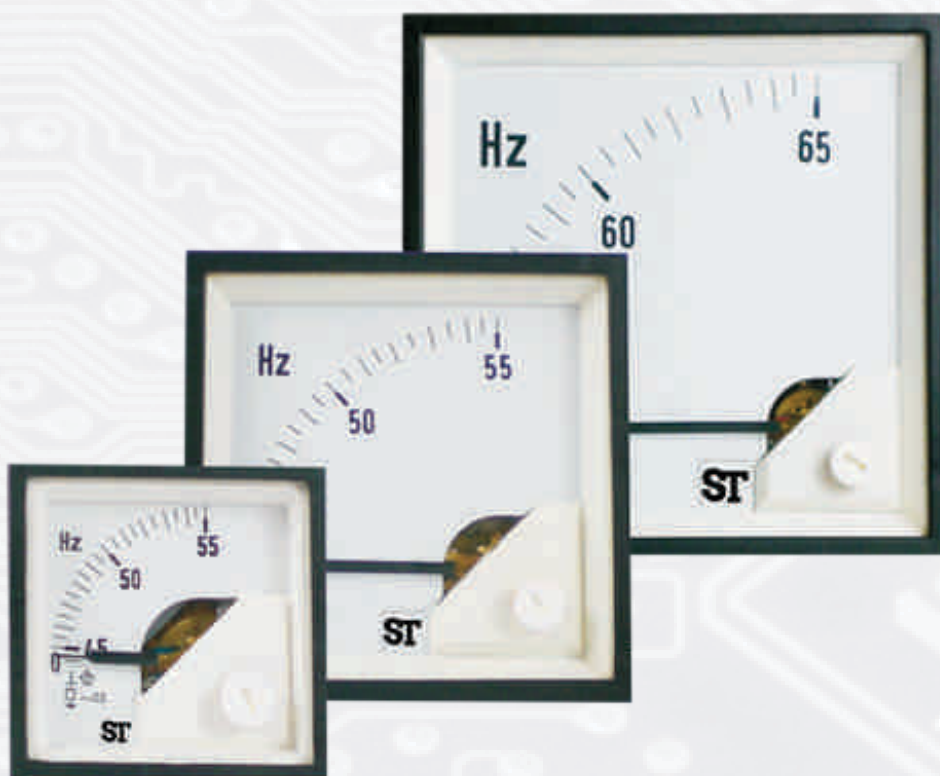

The pointer type frequency meters, FM 48/ 72 / 96 / 144 housed in moulded polycarbonate cases are suitable for the measurement of frequencies in the range of 45 to 450 Hz.

Special Features

- Linear Scale
- Glass filled polycarbonate Lousing.
- Knife edge pointer.
- Easily replacable glass and bezel.

Application

The pointer type frequency meters, FM 48/ 72 / 96 / 144 housed in moulded polycarbonate cases are suitable for the measurement of frequencies in the range of 45 to 450 Hz. For maximum accuracy, the essential measuring range is obtained by suppressing the unwanted frequency span. These instruments offer several advantages in switchboard and Generating Set Panels. Number of meters can be mounted in a Panel Cut out (Mosaic mounting). Front glass, Bezel & Dial can be easily replaced.

Functional Principle

Frequencies are measured with a built in electronic transducer & moving coil indicator. Moving coil movement has pivots of very high hardness. Movement is suspended between spring loaded sapphire jewels. Movement is properly shielded & critically damped by eddy currents induced in coil former.

Mechanical Data

Case details	Moulded square case suitable for mounting in Control / switchgear panels Machinery consoles.
Case material	Polycarbonate , flame retardant and drip proof as per UL 94 V-0.
Front fascia	Glass
Colour of bezel	Black
Position of use	Vertical
Panel fixing	Mounting Clamp
Mounting	Stackable in a single cutout
Panel thickness	≤ 25 mm
Terminals	Hexagon studs, M4 screws and wire clamps E3

Electrical Data

Measured Quantity	Frequency
Input quantity	Alternating voltage in sine waveform
Overload capacity	acc to IEC 51/ DIN EN 60051
Continuously	1.2 times rated current
Short duration	2 times rated voltage, 5 Sec:1 overload 2 times rated voltage, 0.5 Sec:9 overload
Input quantity	Alternating voltage in sine waveform
Enclosure code (IEC 529)	IP 52 case IP 00 for terminals
Insulation class	Group A according to VDE 0110

Rated insulation voltage	660 V
Proof voltage	2 kV
installation category	300 V CAT III
Power consumption	≤ 7VA
Insulation resistance	> 50 Mohm at 500V DC

Standard Measuring Ranges

Frequency Range	45.....50.....55Hz 45.....55.....65Hz 55.....60.....65Hz 360...400...440Hz 380...400...420Hz
Rated input voltage	57.7 V 63.5V 100 V 110 V 115 V 120 V 127V 208 V 220 V 230 V 240 V 289 V 380 V 400 V 415 V 440 V 500 V

Scale and Pointer

Pointer	Knife - edge pointer			
Pointer deflection	0...90°			
Scale characteristics	Linear			
Scale division	Coarse - fine			
Scale length	FM 48	FM 72	FM 96	FM144
	41mm	63 mm	97mm	146mm

Accuracy at Reference Conditions

Accuracy class	1.5 according to IEC51/DIN EN 60051
----------------	-------------------------------------

Ambient temperature	23°C ± 2°C
Position of use	Nominal position ±1°
Input	Rated voltage of measured quantity
Other Conditions	IEC 51/ DIN EN 60051
Preheating time	> 5 min

Nominal Range of use

Ambient Temperature	0...50 °C
Position of use	Nominal position Vertical ± 5°
External Magnetic Field	At 0.4 kA/m
Voltage	Rated voltage + 15%

Environmental Conditions

Climatic Suitability	Climate category II as per IS : 1248 (climatic class 3 according to VDE/VDI 3540)
Operating Temperature	- 10... + 55° C
Storage temperature	- 25...+65° C
Relative humidity	≤ 75% annual average, non condensing
Shock resistance	15 g. for pulse duration 11ms
Vibration resistance	10-55-10Hz for ampli. 0.15mm (1.5g at 50Hz)
Pollution degree	2

Applicable Standards

Nominal case and cutout dimensions for indicating Electrical instruments	DIN IEC 61554
Scale and pointer for electrical measuring instruments	DIN 43802
Connections and Terminal markings for panel meters	DIN 43807
Terminal bolts/leads	DIN 46200/46282
Clamp straps for connections	DIN 46282
Safety requirements and protective measures for Electrical indicating instruments and their accessories	DIN 40050, VDE 0110, VDE 0410 IEC 529, IEC 1010
Performance specifications for direct acting indicating analogue electrical measuring instruments and their accessories	IEC51/DINEN60051 DIN 43701
Front frames for indicating measuring instruments Principle dimensions	DIN 43718

measuring instruments & their accessories Environmental conditions	VDE / VDI 3540
UL Compatibility	UL 94 V-0
Technical conditions of delivery for electrical instruments	DIN 43701
Mechanical strength (Free fall test, vibration test)	IEC 51, VDE 0411, IEC 61010

Comply with following European directives :

2004 / 108 / EC (EMC directive), 2006/95 / EC (low voltage directive) & amendment 93/68/EEC, For CE Marking.

Options

Case

Front Facia	Antiglare glass
Color of bezel	Red, yellow, blue, white
Red index pointer	Front adjustable on site
position of use	on request 0° ...180°


Dial

Blank dial	With initial and end values marked
Special markings	Numbering/Lettering
Division dials	Basic divisions without numbering
Color markings/bands	Red or green

Safety Terminal Protection


Full sized polycarbonate back cover to provide protection against accidental contact (hand and fingers).

Dimensions

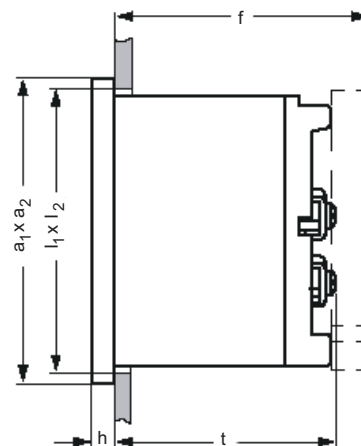

Front in mm	Nominal Dimensions, mm		Cutout, mm $l_1 \times l_2$	Installation Depth Including Terminal (t), mm	Installation Depth Incl. Full back Cover (f), mm
	$a_1 \times a_2$	h			
48 x 48	48 x 48	5.5	$45^{+0.6} \times 45^{+0.6}$	54	62.5
72 x 72	72 x 72	5.5	$68^{+0.7} \times 68^{+0.7}$	54	62.5
96 x 96	96 x 96	5.5	$92^{+0.8} \times 92^{+0.8}$	54	62.5

Connection

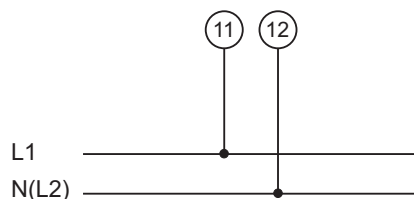

Safety Precautions

- 1) Instruments with damaged bezel or glasses must be disconnected from the mains.
- 2) Adequate safety clearance must be maintained to control panel fasteners and to sheet metal housing. If non - insulated connector wires are used.
- 3) The back cover must be snapped into place after connector wires have been clamped for protection against accidental contact.
- 4) Bezel, Scale and Glass may only be replaced under voltage free conditions.
- 5) Instruments to be used in grounded panel.

Ordering Information- Only For Representative Products

Size: 48 x 48

Part No.	Description	Class
ZQ44-46053N1CAW0ST	45-55-65 Hz, 100V	CL-0.5
ZQ44-46083N1CAW0ST	45-55-65 Hz, 120V	CL-0.5
ZQ44-46123N1CAW0ST	45-55-65 Hz, 220V	CL-0.5
ZQ44-46143N1CAW0ST	45-55-65 Hz, 240V	CL-0.5
ZQ44-46243N1CAW0ST	45-55-65 Hz, 100-125V	CL-0.5
ZQ44-46263N1CAW0ST	45-55-65 Hz, 200-250V	CL-0.5

Part No.	Description	Class
ZQ44-56053N1CAW0ST	55-60-65 Hz, 100V	CL-0.5
ZQ44-56083N1CAW0ST	55-60-65 Hz, 120V	CL-0.5
ZQ44-56123N1CAW0ST	55-60-65 Hz, 220V	CL-0.5
ZQ44-56143N1CAW0ST	55-60-65 Hz, 240V	CL-0.5
ZQ44-56243N1CAW0ST	55-60-65 Hz, 100-125V	CL-0.5
ZQ44-56263N1CAW0ST	55-60-65 Hz, 200-250V	CL-0.5

Size: 72 x 72

Part No.	Description	Class
ZQ74-46053N1CAW0ST	45-55-65 Hz, 100V	CL-0.5
ZQ74-46083N1CAW0ST	45-55-65 Hz, 120V	CL-0.5
ZQ74-46123N1CAW0ST	45-55-65 Hz, 220V	CL-0.5
ZQ74-46143N1CAW0ST	45-55-65 Hz, 240V	CL-0.5
ZQ74-46243N1CAW0ST	45-55-65 Hz, 100-125V	CL-0.5
ZQ74-46263N1CAW0ST	45-55-65 Hz, 200-250V	CL-0.5

Part No.	Description	Class
ZQ74-56053N1CAW0ST	55-60-65 Hz, 100V	CL-0.5
ZQ74-56083N1CAW0ST	55-60-65 Hz, 120V	CL-0.5
ZQ74-56123N1CAW0ST	55-60-65 Hz, 220V	CL-0.5
ZQ74-56143N1CAW0ST	55-60-65 Hz, 240V	CL-0.5
ZQ74-56243N1CAW0ST	55-60-65 Hz, 100-125V	CL-0.5
ZQ74-56263N1CAW0ST	55-60-65 Hz, 200-250V	CL-0.5

Size: 96 x 96

Part No.	Description	Class
ZQ94-46053N1CAW0ST	45-55-65 Hz, 100V	CL-0.5
ZQ94-46083N1CAW0ST	45-55-65 Hz, 120V	CL-0.5
ZQ94-46123N1CAW0ST	45-55-65 Hz, 220V	CL-0.5
ZQ94-46143N1CAW0ST	45-55-65 Hz, 240V	CL-0.5
ZQ94-46243N1CAW0ST	45-55-65 Hz, 100-125V	CL-0.5
ZQ94-46263N1CAW0ST	45-55-65 Hz, 200-250V	CL-0.5

Part No.	Description	Class
ZQ94-56053N1CAW0ST	55-60-65 Hz, 100V	CL-0.5
ZQ94-56083N1CAW0ST	55-60-65 Hz, 120V	CL-0.5
ZQ94-56123N1CAW0ST	55-60-65 Hz, 220V	CL-0.5
ZQ94-56143N1CAW0ST	55-60-65 Hz, 240V	CL-0.5
ZQ94-56243N1CAW0ST	55-60-65 Hz, 100-125V	CL-0.5
ZQ94-56263N1CAW0ST	55-60-65 Hz, 200-250V	CL-0.5

For more details and product codes, please contact our local office



sifam tinsley
PRECISION INSTRUMENTATION

Sifam Tinsley Instrumentation Inc.
3105, Creekside Village Drive,
Suite No. 801, Kennesaw,
Georgia 30144 (USA)
E-mail Id : psk@sifamtinsley.com
Web : www.sifamtinsley.com
Contact No. : +1 404 736 4903

Sifam Tinsley Instrumentation Ltd
Unit 1 Warner Drive,
Springwood Industrial Estate
Braintree, Essex, UK, CM72YW
E-mail: sales@sifamtinsley.com
Web: www.sifamtinsley.com/uk
Contact: +44(0)1803615139