


# N21 DIGITAL PANEL METER

## FEATURES:




## INPUTS:



## OUTPUTS:



## GALVANIC ISOLATION:



Sifam Tinsley Instrumentation Ltd  
Unit 1 Warner Drive,  
Springwood Industrial Estate  
Braintree, Essex, UK, CM72YW  
E-mail: sales@sifamtinsley.com  
Web: www.sifamtinsley.com/uk  
Contact: +44(0)1803615139




Sifam Tinsley Instrumentation Inc.  
3105, Creekside Village Drive,  
Suite No. 801, Kennesaw,  
Georgia 30144 (USA)  
E-mail Id : psk@sifamtinsley.com  
Web: www.sifamtinsley.com  
Contact No.: +1 404 736 4903



- Universal measuring input (for standard signals and cooperation with temperature sensors).
- New range in DC voltage measurement: +/- 75mV.**
- Relay alarm output.
- Visualization of the measurement as a horizontal or vertical bar graph - NEW!**
- Universal supply voltage from 24 V up to 230 V a.c./d.c.
- Supply of object transducers 24 V d.c.
- OLED display.
- Meter configuration through miniUSB connector with eCon software.
- Programmable parameters in eCon software:
  - selection of measured value,
  - rescaling of indications (individual characteristic),
  - accuracy of measured value (decimal point),
  - alarm output mode,
  - measurement averaging time,
  - defining your own unit,
  - language selection.

## EXAMPLE OF APPLICATION

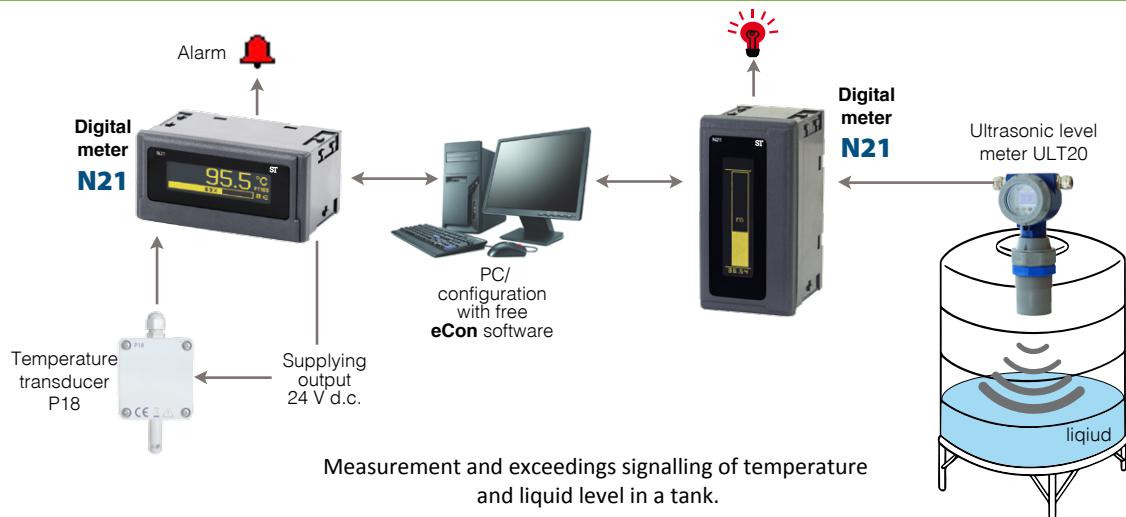

## INPUTS

Input type	Measuring range	Parameters	Basic error
Voltage input	-90 mV...-75 mV...75 mV...90 mV -12 V...-10 V...10 V...12 V	Input resistance: >200 kΩ Input resistance: >1 MΩ	± (0.1% of range+ 1 digit)
Current input	-24 mA...-20 mA...20 mA...24 mA	Input resistance: <10 Ω ± 1%	
Temperature measurement Pt100	- 200...850°C	current flowing through the sensor < 300 μA	
Temperature measurement through J thermocouple	- 50...1200°C		
Temperature measurement through K thermocouple	- 50...1370°C		

## OUTPUTS

Output type	Properties
Alarm output	alarm relay output NO, load capacity 250 V~/0.5 A~ number of switches 1x10 <sup>5</sup>
Supply for external transducers	24 V d.c. ± 5%, 30 mA

## EXTERNAL FEATURES

Readout field	OLED display 128 x 32 pixels in amber color
Weight	< 0.25 kg
Overall dimensions	96 x 48 x 64 mm
Protection grade (acc. to EN 60529)	from frontal side: IP65 from terminal side: IP20

## RATED OPERATING CONDITIONS

Supply voltage	22..60 V a.c. 50..400 Hz / 20..60 V d.c. (terminals 12-13) 60..253 V a.c. 40..400 Hz / 60..300 V d.c. (terminals 13-14)	power consumption < 3 VA
Operating temperature	ambient: -10...23...55°C	storage: -25...85°C
Relative humidity	< 95%	condensation inadmissible
Operating position	any	

## SAFETY AND COMPATIBILITY REQUIREMENTS

Electromagnetic compatibility	noise immunity noise emissions	acc. to EN 61000-6-2 acc. to EN 61000-6-4
Safety requirements		acc. to EN 61010-1
Galvanic isolation	3.2 kV d.c.	

## CONNECTION DIAGRAMS

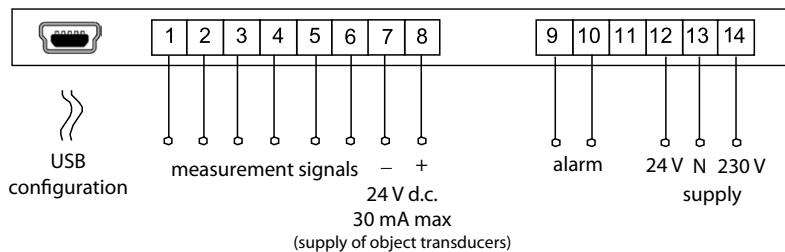


Fig. 1 Electrical connections of N21 meter.

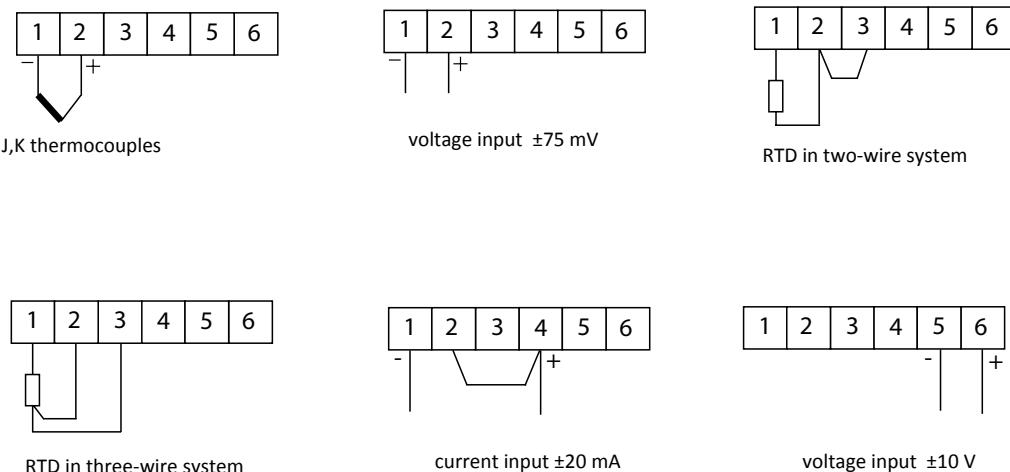


Fig. 2. Connection to measuring inputs.

## ORDERING

ORDERING CODE				
N21 - X X X X				
Version (display):				
horizontal	0			
vertical	V			
Version:				
standard	0			
Language:	P			
Polish				
English	E			
Acceptance tests:				
without extra requirements	0			
with an extra quality inspection certificate	1			
with test certificate	2			

## N21 meter has in standard:

- programmable input,
- relay output,
- supplying output 24 V d.c.,
- supply voltage: 22..60 V a.c. 50..400 Hz / 20..60 V d.c. (terminals 12-13),  
60..253 V a.c. 40..400 Hz / 60..300 V d.c. (terminals 13-14),
- miniUSB socket for meter programming.

## ORDER EXMAPLE:

The code N21-00E0 means:

- N21 – meter N21,  
0 - horizontal version (display),  
0 - standard version,  
E - english version,  
0 - without extra requirements.

Sifam Tinsley Instrumentation Ltd  
Unit 1 Warner Drive,  
Springwood Industrial Estate  
Braintree, Essex, UK CM7 2YW  
E-mail: sales@sifamtinsley.com  
Web: www.sifamtinsley.com/uk  
Contact: +44(0)1803 615139



Sifam Tinsley Instrumentation Inc.  
3105, Creekside Village Drive,  
Suite No. 801, Kennesaw,  
Georgia 30144 (USA)  
E-mail Id : psk@sifamtinsley.com  
Web: www.sifamtinsley.com  
Contact No.: +1 404 736 4903